





IPHNM10

The IPHNM10 horizontal lifting clamps have a pretension feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of non-sagging material. To be used where material surface must not be damaged. These clamps must be used in pairs or more.

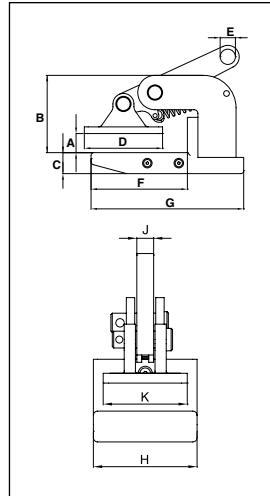

IPH10

The IPH10 horizontal lifting clamps with spring loaded tension have a pretension feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of non-sagging material. These clamps must be used in pairs or more.

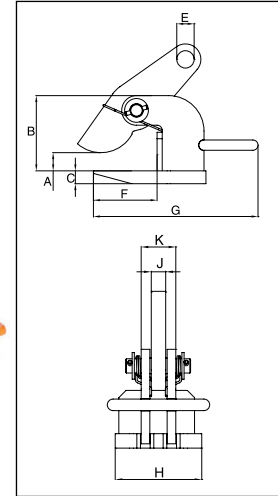

For Horizontal Lift and Transfer with Pretension System

- Available in capacities of .5 thru 12 metric tons.
- Jaw openings available: 0" to 4.75".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance replacement parts are available.
- Manufactured by a ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.



Load Rated

Model IPHNM10

Model	Working Load Limit (Per Pair) (t)*	IPHNM10 Stock No.	Weight Each (lbs.)	Dimensions (in.)									
				Jaw A	B	C	D	E	F	G	H	J	K
IPHNM10	.5	2703287	4.41	0 - .75	3.19	.87	3.23	.63	3.98	6.30	2.91	.47	2.36
IPHNM10	1	2703288	7.70	0 - 1.38	3.66	1.18	3.62	.63	4.06	6.46	2.91	.47	2.36
IPHNM10	2	2703290	16.5	0 - 1.19	5.47	1.18	5.16	.87	6.54	9.65	3.94	.79	2.91
IPHNM10/J	2	2703291	17.6	1.19 - 2.38	6.65	1.18	5.16	.87	6.54	9.65	3.94	.79	2.91

* Design Factor based on EN 13155 and ASME B30.20.

Model IPH10 and IPH10/J: With Spring Loaded Tension, Magnets and Handle

Model	Working Load Limit (Per Pair) (t)*	IPH10 Stock No.	Weight Each (lbs.)	Dimensions (in.)									
				Jaw A	B	C	E	F	G	H	J	K	
IPH10	.5+	2703297	3.97	0 - .75	3.39	.47	.63	4.06	5.91	2.36	.47	1.06	
IPH10	1+	2703298	5.50	0 - 1.38	3.94	.63	.63	4.06	5.91	2.36	.47	1.22	
IPH10	2	2703522	12.1	0 - 2.38	4.61	.63	.87	4.29	10.08	4.33	.79	1.57	
IPH10	3	2703523	16.5	0 - 2.38	4.61	.79	1.02	4.29	10.47	4.72	.79	1.89	
IPH10	4.5	2703524	23.1	0 - 2.38	5.20	.98	1.18	4.09	11.02	5.12	.79	1.89	
IPH10	6	2703525	28.6	0 - 2.38	5.63	.98	1.42	4.84	12.60	5.12	.79	1.89	
IPH10	9	2703526	40.8	0 - 2.38	6.18	1.18	1.69	5.24	12.99	5.51	.98	2.44	
IPH10	12	2703527	47.4	0 - 2.38	6.77	1.18	1.85	5.55	13.90	5.91	.98	2.44	
With larger jaw opening #													
IPH10/J	3	2703533	19.8	2.38 - 4.75	6.97	.79	1.02	4.29	10.47	4.72	.79	1.89	
IPH10/J	4.5	2703534	26.5	2.38 - 4.75	7.56	.98	1.18	4.09	11.02	5.12	.79	1.89	
IPH10/J	6	2703535	33.1	2.38 - 4.75	7.99	.98	1.42	4.84	12.60	5.12	.79	1.89	
IPH10/J	9	2703536	45.2	2.38 - 4.75	8.54	1.18	1.69	5.24	12.99	5.51	.98	2.44	
IPH10/J	12	2703537	52.9	2.38 - 4.75	9.13	1.18	1.85	5.55	13.90	5.91	.98	2.44	

* Design Factor based on EN 13155 and ASME B30.20. + No handle or magnets. # Larger Working Load Limits available.

