

**Hydraulic**

**Toe Jacks**

**V / V-EX / G / U**



# Hydraulic Toe Jacks


## V / V-EX / G / U

GKS-PERFEKT hydraulic toe jacks meet the highest quality standards. For decades our equipment has proven to be exceptionally robust and durable. Our jacks are 100% tested and approved before leaving the factory to assure proper functionality and appearance. The customer receives a ready to use, practical device for multi-purpose applications at any given site.

General GKS-PERFEKT Toe Jack features:

- High-grade material
- Precision guideways
- Our well-proven forged safety toe with high safety margin
- Testmark BGV D8 (D), ANSI/ASME (USA)
- Module design for easy repair/maintenance
- Lifetime technical support

### Toe Jack V5

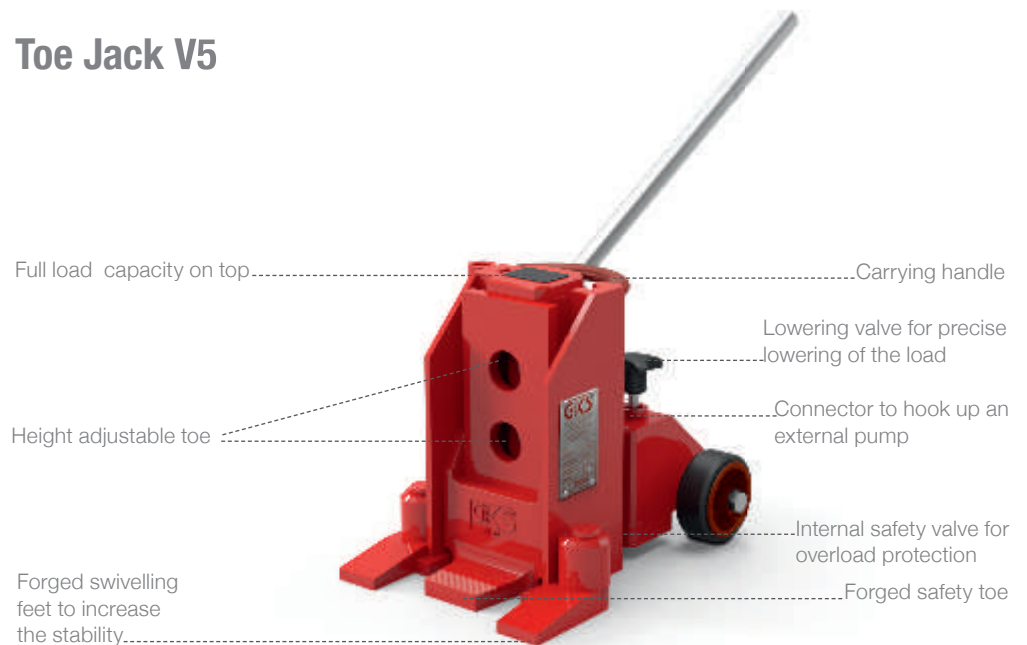



**Toe Jacks V ▶▶ For heavy loads up to 10 tons**



- Forged safety toe, made of high-strength, hardened and tempered material
- Forging yields a very high safety margin
- A peg on the back secures correct insertion
- Using the hand pump PV with 2 jacks or electric pump PE with 4 jacks allows the doubling/ quadrupling of the load capacity (see details on page 10)



**V5**



**V10**

**Technical data**

	<b>V5</b>	<b>V10</b>
Item number	10181	10182
Full load capacity	50 kN ( 5 t)	100 kN (10 t)
Working pressure	520 bar	520 bar
Minimum loading height using safety toe	15 mm	20 mm
Lifting height	140 mm	160 mm
Adjustable range of safety toe	3 x	4 x
Loading height using top plate	252 mm	310 mm
Overall dimensions (L x W x H)	285 x 235 x 252 mm	357 x 260 x 310 mm
Tare weight incl. oil fill	21 kg	32 kg



**Toe Jacks V ▶▶ For heavy loads up to 20 tons**



- Easy rolling of the toe jack by tilting back with lifting handle through upend enables a back-friendly transport



**V15**



**V20**

**Technical data**

	<b>V15</b>	<b>V20</b>
Item number	10183	10184
Full load capacity	150 kN (15 t)	200 kN (20 t)
Working pressure	520 bar	520 bar
Minimum loading height using safety toe	25 mm	30 mm
Lifting height	160 mm	160 mm
Adjustable range of safety toe	4x	3x
Loading height using top plate	318 mm	325 mm
Overall dimensions (L x W x H)	390 x 320 x 318 mm	425 x 326 x 325 mm
Tare weight incl. oil fill <sup>II</sup>	53 kg	72 kg