


Rotating Trolleys

RL



GKS-PERFEKT rotating trolleys are available for loads from 1 t to 6 t. The special bearings in our rotating trolleys allow easy moving and rotating 360° around its own axis. Use a set of 3 or 4 rotating trolleys or even more simultaneously, depending on the machine's support points, load distribution and floor conditions. Depending on the situation a combination of rotating trolleys with L / F / TL trolleys is possible.

Rotating Trolley RL4

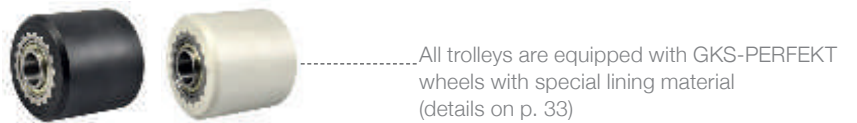



Rotating Trolleys RL ▶▶ For heavy loads up to 2 t

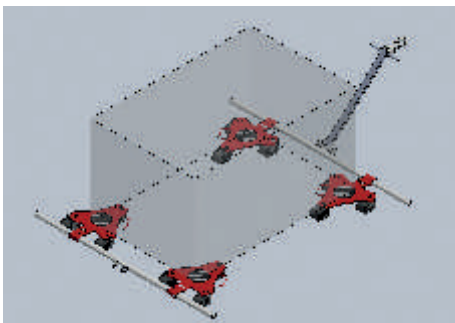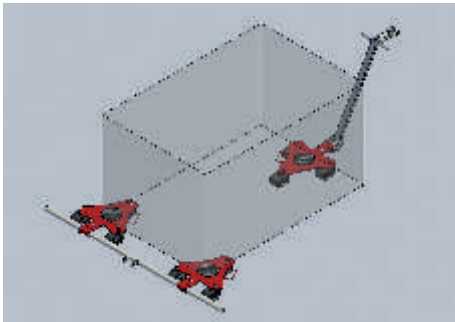

- RL trolleys with the same loading height can be combined for 3 or 4-point support
- Options: connecting bar and steering rod
- RL trolleys can be equipped with GKS-ALPERFEKT@PUR wheels for sensitive floors
- Depending on the load distribution, it's possible to combine different RL models, but with the same loading height



RL1




RL2

Technical data	RL1	RL2
Item number	11456	10238
Number of wheels/dimensions	3 à 75 x 66 mm	3 à 85 x 85 mm
Loading height	100 mm	110 mm
Size of rubber pad Ø	170 mm	170 mm
Overall dimensions (L x W x H)	376 x 379 x 100 mm	685 x 515 x 110 mm
Tare weight in kg	15 kg	30 kg
Load capacity	10 kN (1 t)	20 kN (2 t)



Rotating Trolleys RL ▶▶ For heavy loads up to 6 t

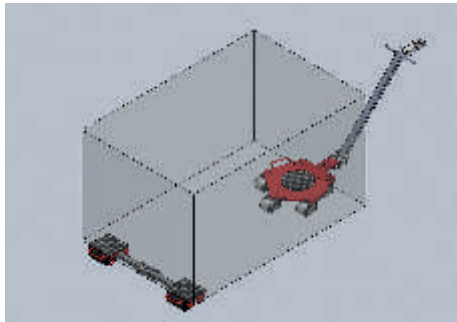

- Rotating trolleys can be combined with F or Tandem TL trolleys with same loading height



RL4



RL6

Technical data	RL4	RL6
Item number	10240	13439
Number of wheels/dimensions	5 à 85 x 85 mm	5 à 85 x 85 mm
Loading height	110 mm	118 mm
Size of rubber pad Ø	250 mm	250 mm
Overall dimensions (L x W x H)	760 x 560 x 110 mm	760 x 560 x 118 mm
Tare weight in kg	50 kg	60 kg
Load capacity	40 kN (4 t)	60 kN (6 t)