





**Transport Trolleys F / L ▶▶ For heavy loads up to 60 t**



- Heavy duty transport trolleys F/L 20 to F/L 60 for loads from 40 t to 120 t
- Extremely low loading height: 180 mm
- All transport trolleys from F/L 20 to F/L 60 are interchangeable due to identical loading height
- For increased stability, models F30 and bigger are equipped with two connecting rods.

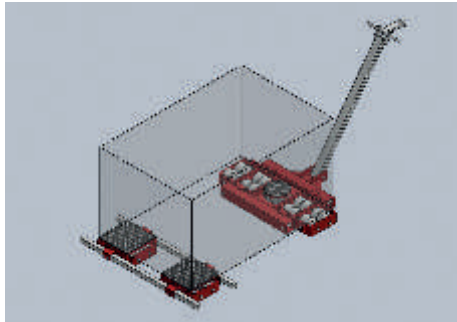

**F20 / L20**

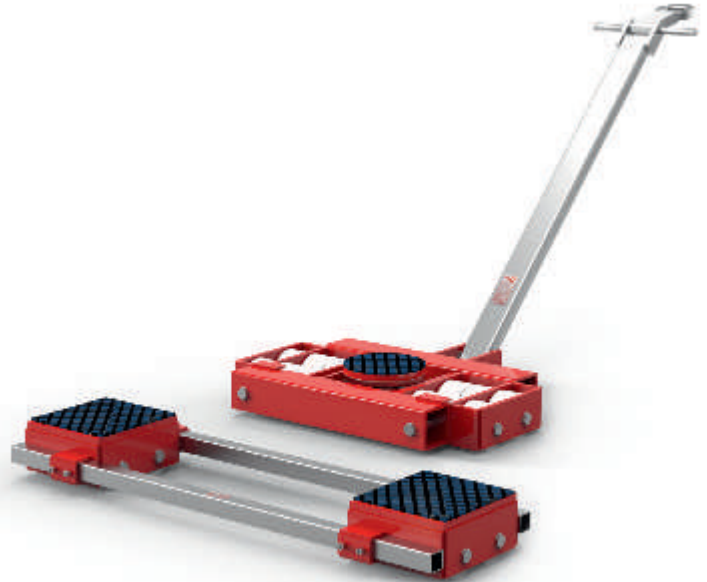

**F30 / L30**

Technical data	F20	L20	F30	L30
Item number	11060	11061	11992	11993
Loading height/no. of wheels (140 x 85 mm)	180 mm / 8	180 mm / 8	180 mm / 12	180 mm / 12
Contact surface per cassette	280 x 220 mm	-	288 x 300 mm	-
Connecting rod, adjustable	440 - 1600 mm	-	650 - 1830 mm	-
Swivel plate Ø 250 mm, steering angle	-	± 90°	-	± 90°
Steering rod	-	1620 mm	-	1620 mm
Overall dimensions (L x W)	-	747 x 800 mm	-	820 x 952 mm
Tare weight in kg	81 kg	170 kg	128 kg	214 kg
Load capacity	200 kN (20 t)	200 kN (20 t)	300 kN (30 t)	300 kN (30 t)
Total load capacity	400 kN (40 t)		600 kN (60 t)	