




Special Transport Trolleys ▶ ▶ For heavy loads up to 2,8 t

GKS-PERFEKT Twinlifter TW28

- Ideally suited for the transport of bulky and heavy loads such as tool cabinets, control cabinets, safes, crates, machinery, boilers etc.
- Sturdy welded design, 2 hydraulic lifting units with hand pump and drain valve, tandem steering of wheels via handle, standard polyurethane wheels, polyamide wheels optionally.

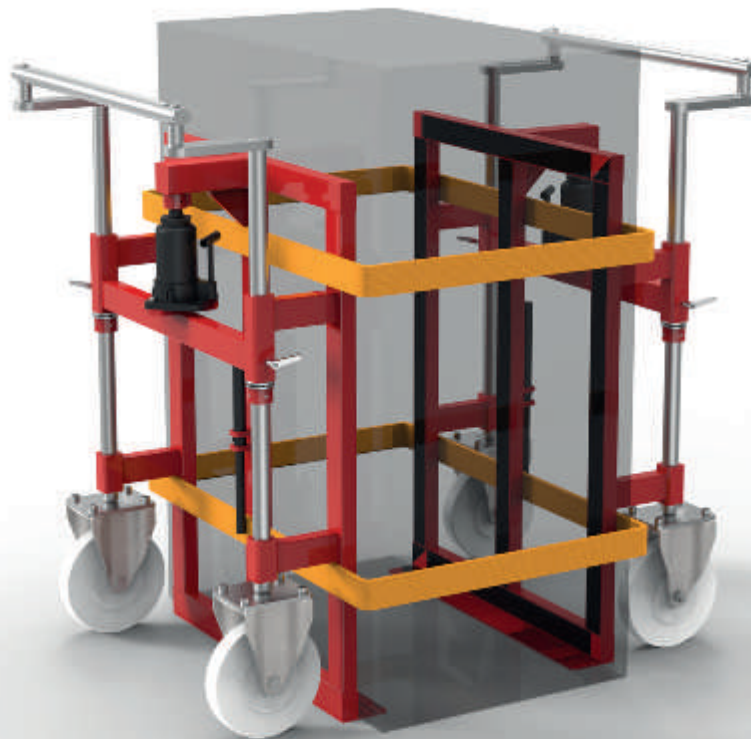

TW28

Technical data

Twinlifter TW28

Item number	11082 (PA-Wheels), 13687 (PU-wheels)
Load capacity per pair	28 kN (2,8 t)
Lifting height max.	177 mm
Max. Overall Height	1000 mm
Width	650 mm
Loading Height	5 mm
Min. Wheel Diameter	200 mm
Length of Lashing Strap incl. Tension Ratchet	8000 mm
Tare weight ca.	60 kg

Technical specifications are subject to change. Included in the delivery: 2 lashing straps incl. tension ratchet