




Transport Trolleys F / L ►► For heavy loads up to 12 tons



- Our standard transport trolleys F/L3 up to F/L18 for heavy loads from 6 t up to 36 t
- Extremely low loading height
- All transport trolleys from F/L 3 to F/L 18 are interchangeable due to identical loading height

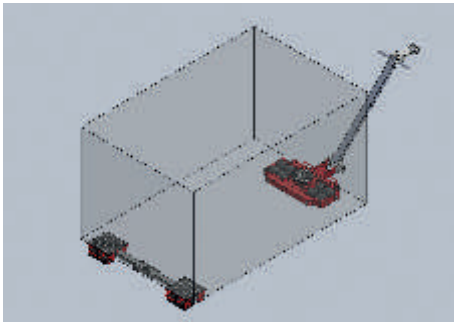

F3 / L3




F6 / L6

Technical data	F3	L3	F6	L6
Item number	10206	10207	10208	10209
Loading height/no. of wheels (85 x 85 mm)	110 mm / 4	110 mm / 4	110 mm / 8	110 mm / 8
Contact surface per cassette	150 x 150 mm	-	200 x 220 mm	-
Connecting rod, adjustable	300 - 1000 mm	-	640 - 1030 mm	-
Swivel plate Ø 170 mm, steering angle	-	± 90°	-	± 90°
Steering rod	-	950 mm	-	1080 mm
Overall dimensions (L x W)	-	270 x 230 mm	-	610 x 520 mm
Tare weight in kg	15 kg	12 kg	30 kg	41 kg
Load capacity	30 kN (3 t)	30 kN (3 t)	60 kN (6 t)	60 kN (6 t)
Total load capacity	60 kN (6 t)		120 kN (12 t)	



Transport Trolleys F / L ▶▶ For heavy loads up to 36 tons

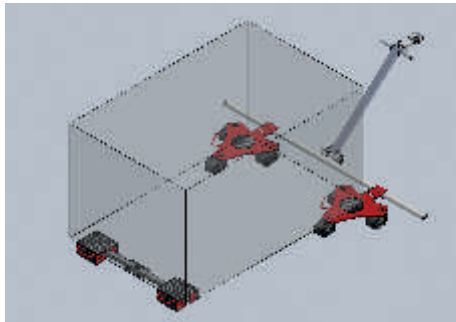

- Can be combined with Tandem trolleys TL6 / TL12 or rotating trolleys RL2 / RL4 / RL6



F9 / L9

**F12 / L12
F18/L18 (w/o pic)**

Technical data	F9	L9	F12	L12	F18	L18
Item number	11070	11071	10312	10313	10215	10216
Loading height/no. of wheels (85 x 85 mm)	110 mm / 12	110 mm / 12	110 mm / 16	110 mm / 16	110 mm / 16	110 mm / 16
Contact surface per cassette	320 x 200 mm	-	200 x 407 mm	-	200 x 407 mm	-
Connecting rod, adjustable	840 - 1230 mm	-	1014 - 1430 mm	-	1014 - 1430 mm	-
Drehteller Ø170 mm, Lenkwinkel	-	± 90°	-	± 90°	-	± 90°
Steering rod	-	1080 mm	-	1080 mm	-	1080 mm
Overall dimensions (L x W)	-	840 x 583 mm	-	1030 x 620 mm	-	1030 x 620 mm
Tare weight in kg	43 kg	59 kg	52 kg	80 kg	55 kg	82 kg
Load capacity	90 kN (9 t)	90 kN (9 t)	120 kN (12 t)	120 kN (12 t)	180 kN (18 t)	180 kN (18 t)
Total load capacity	180 kN (18 t)		240 kN (24 t)		360 kN (36 t)	