
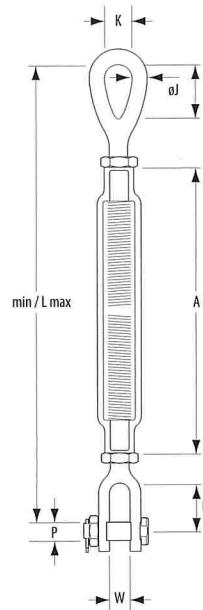


<< OPEN BODY TURNBUCKLES; JAW - OBLONG EYE

GENERALLY TO
ASTM F 1145-92



Model Nr.	Thread ϕ x Take-up		WLL (Mtons)	L min (mm)	L max (mm)	Dimensions (mm)							Weight (kg)
	(inch)	(mm)				A	ϕJ	K	L	P	U	W	
SPS UNC.25.152.J-O	1 x 6	25.4 x 152	4,54	470	670	228	23	36	76	22	52	34	4,05
SPS UNC.25.305.J-O	1 x 12	25.4 x 305	4,54	620	970	380	23	36	76	22	52	34	5,08
SPS UNC.25.457.J-O	1 x 18	25.4 x 457	4,54	680	1260	532	23	36	76	22	52	34	6,03
SPS UNC.25.610.J-O	1 x 24	25.4 x 610	4,54	930	1580	685	23	36	76	22	52	34	7,71
SPS UNC.32.305.J-O	1-1/4 x 12	31.8 x 305	6,89	690	1050	384	29	46	90	28	71	44	8,81
SPS UNC.32.457.J-O	1-1/4 x 18	31.8 x 457	6,89	850	1350	537	29	46	90	28	71	44	11,00
SPS UNC.32.610.J-O	1-1/4 x 24	31.8 x 610	6,89	990	1650	689	29	46	90	28	71	44	12,90
SPS UNC.38.305.J-O	1-1/2 x 12	38.1 x 305	9,71	725	1105	400	32	54	103	35	71	52	13,10
SPS UNC.38.457.J-O	1-1/2 x 18	38.1 x 457	9,71	880	1410	553	32	54	103	35	71	52	15,90
SPS UNC.38.610.J-O	1-1/2 x 24	38.1 x 610	9,71	1030	1715	705	32	54	103	35	71	52	17,80
SPS UNC.44.457.J-O	1-3/4 x 18	44.5 x 457	12,70	950	1410	568	38	60	117	41	86	66	24,40
SPS UNC.44.610.J-O	1-3/4 x 24	44.5 x 610	12,70	1100	1711	721	38	60	117	41	86	66	27,50
SPS UNC.51.610.J-O	2 x 24	51.0 x 610	16,80	1235	1845	738	45	68	146	51	94	66	40,40
SPS UNC.63.610.J-O	2-1/2 x 24	63.5 x 610	27,20	1315	1925	789	51	79	165	57	113	76	68,00
SPS UNC.70.610.J-O	2-3/4 x 24	70.0 x 610	34,00	1370	1980	789	57	82	177	70	106	92	83,00

Minimum Ultimate Strength = 5 x WLL

- Standard hot dip galvanized.
- Factory supplied with lock nuts.
- Straight or in-line pull only.
- Drop forged high tensile steel.



SEE OUR WARNING & SAFETY
INFORMATION ON PAGES 140 - 152

