


# A Series

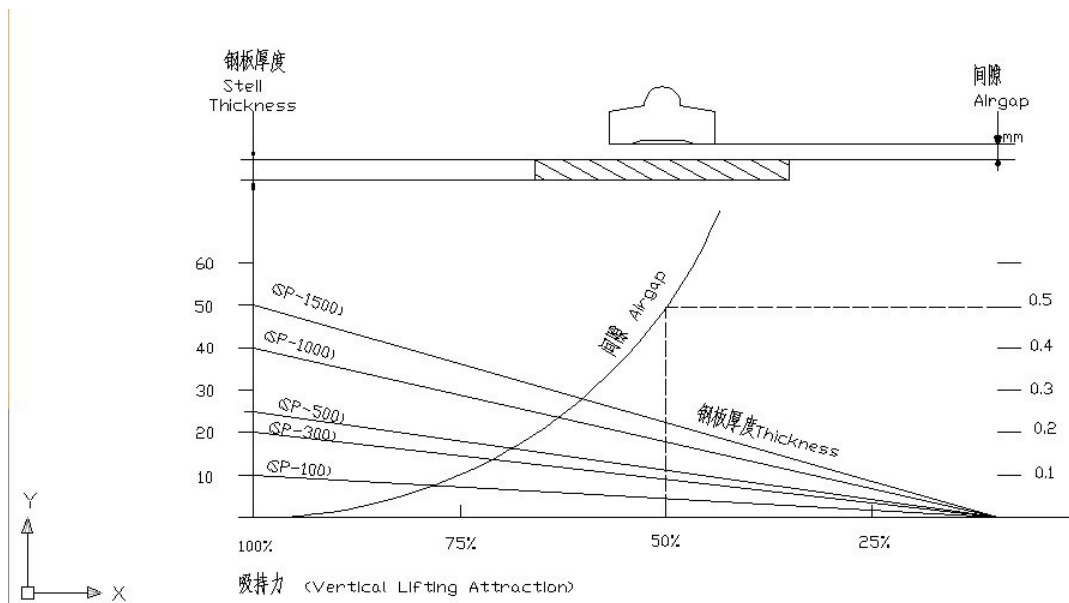

- Range of capacities from 100Kg to 1500Kg
- 3.5:1 safety factor
- Available in 5 models

Model	Rated lifting strength (kgf)	Cylindrical lifting strength (kgf)	Max. pull-off strength (kgf)	W	L	H	I	Operation temperature (°C)	Dead weight (kg)
XQFA100	100	30	350	70	125	75	190	< 80	4
XQFA300	300	100	1050	88	208	94	200		10.5
XQFA500	500	150	1750	100	278	100	260		16
XQFA1000	1000	300	3500	127	361	125	330		38
XQFA1500	1500	500	5250	151	394	135	355		53