


<< OPEN BODY TURNBUCKLES; OBLONG EYE - OBLONG EYE

GENERALLY TO
ASTM F 1145-92

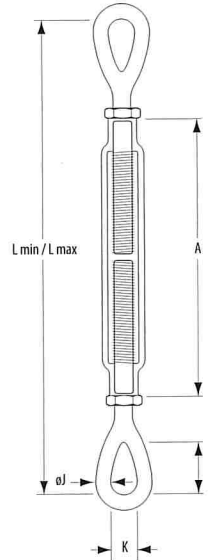

| Model Nr. | Thread ϕ x Take-up | | WLL (Mtons) | L min (mm) | L max (mm) | Dimensions (mm) | | | | Weight (kg) |
|--------------------|-------------------------|------------|-------------|------------|------------|-----------------|----------|----|-----|-------------|
| | (inch) | (mm) | | | | A | ϕJ | K | L | |
| SPS UNC.25.152.O-O | 1 x 6 | 25.4 x 152 | 4,54 | 507 | 710 | 228 | 23 | 36 | 76 | 4,10 |
| SPS UNC.25.305.O-O | 1 x 12 | 25.4 x 305 | 4,54 | 660 | 1015 | 380 | 23 | 36 | 76 | 5,22 |
| SPS UNC.25.457.O-O | 1 x 18 | 25.4 x 457 | 4,54 | 812 | 1320 | 532 | 23 | 36 | 76 | 6,35 |
| SPS UNC.25.610.O-O | 1 x 24 | 25.4 x 610 | 4,54 | 964 | 1625 | 685 | 23 | 36 | 76 | 7,82 |
| SPS UNC.32.305.O-O | 1-¼ x 12 | 31.8 x 305 | 6,89 | 719 | 1087 | 384 | 29 | 46 | 90 | 8,62 |
| SPS UNC.32.457.O-O | 1-¼ x 18 | 31.8 x 457 | 6,89 | 871 | 1392 | 537 | 29 | 46 | 90 | 10,40 |
| SPS UNC.32.610.O-O | 1-¼ x 24 | 31.8 x 610 | 6,89 | 1024 | 1697 | 689 | 29 | 46 | 90 | 12,20 |
| SPS UNC.38.305.O-O | 1-½ x 12 | 38.1 x 305 | 9,71 | 775 | 1156 | 400 | 32 | 54 | 103 | 12,50 |
| SPS UNC.38.457.O-O | 1-½ x 18 | 38.1 x 457 | 9,71 | 927 | 1461 | 553 | 32 | 54 | 103 | 14,10 |
| SPS UNC.38.610.O-O | 1-½ x 24 | 38.1 x 610 | 9,71 | 1080 | 1765 | 705 | 32 | 54 | 103 | 17,00 |
| SPS UNC.44.457.O-O | 1-¾ x 18 | 44.5 x 457 | 12,70 | 1000 | 1457 | 568 | 38 | 60 | 117 | 23,80 |
| SPS UNC.44.610.O-O | 1-¾ x 24 | 44.5 x 610 | 12,70 | 1153 | 1762 | 721 | 38 | 60 | 117 | 26,30 |
| SPS UNC.51.610.O-O | 2 x 24 | 51.0 x 610 | 16,80 | 1313 | 1923 | 738 | 45 | 68 | 146 | 38,70 |
| SPS UNC.63.610.O-O | 2-½ x 24 | 63.5 x 610 | 27,20 | 1387 | 1997 | 789 | 51 | 79 | 165 | 65,00 |
| SPS UNC.70.610.O-O | 2-¾ x 24 | 70.0 x 610 | 34,00 | 1448 | 2057 | 788 | 57 | 82 | 177 | 88,00 |

Minimum Ultimate Strength = 5 x WLL

- Standard hot dip galvanized.
- Factory supplied with lock nuts.
- Straight or in-line pull only.
- Drop forged high tensile steel.

 SEE OUR WARNING & SAFETY INFORMATION ON PAGES 140 - 152

